


Product data sheet

BKD90-D-1/3/5

Bayonet-System cover with nozzle

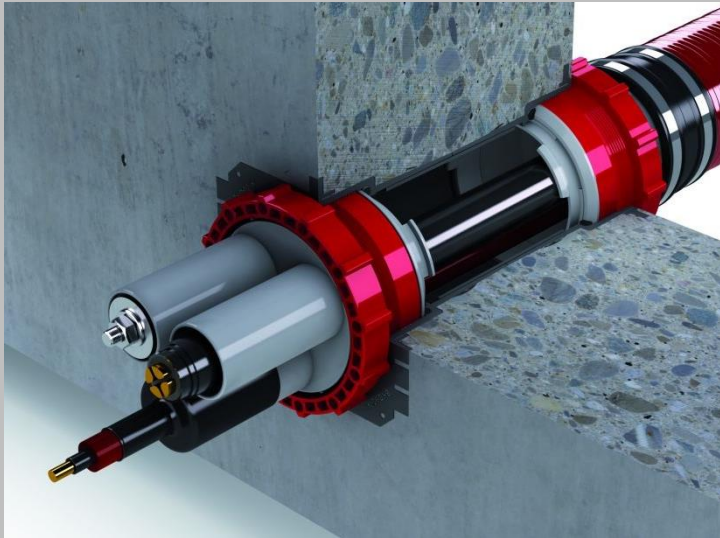

Advantages and use:

- Wide range of applications for one to five cables or pipes
- Double safety due to bayonet locking and additional screw connection in flange sleeve
- Sealing of the cables by means of precisely fitting thermosleeve
- For the passage of cables from 7 - 73 mm
- made of environmentally friendly and chemically highly resistant materials (polycarbonate)

Technical data:


- gas- watertight up to 2,5 bar
- suitable for flange sleeve BKD90 and BKD90 surface mount flanges
- all covers also available with cold shrink sleeves
- Unused nozzles can be closed with precisely fitting VS-plugs

material specification:

System cover (PC), clamping nut (PC), O-Ring (NBR), thermal sleeves (Polyolefin)

test certificates:

Fraunhofer Institut IFAM leak test

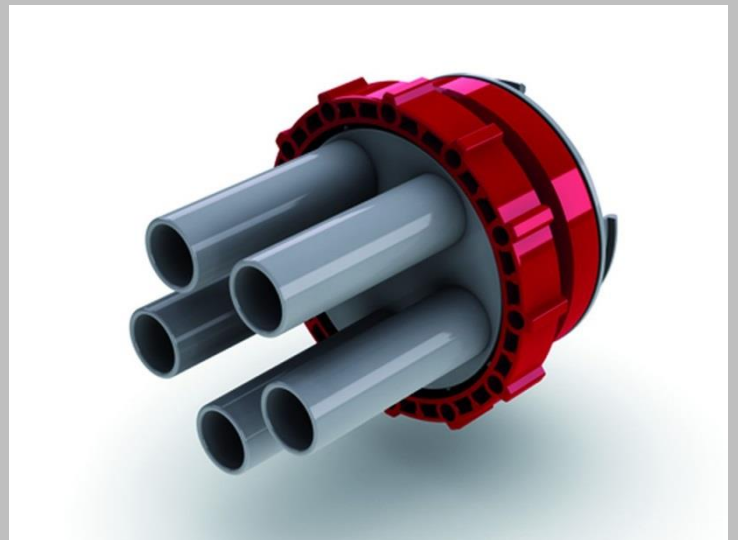

Product data sheet

BKD90-D-1/3/5

Bayonet-System cover with nozzle



standard versions:

Variants	For cables or pipes with Ø [mm]	Description
BKD90-D-1/75-TM	26 – 73	With a nozzle and a thermo-sleeve
BKD90-D-3/30(3/3)-TM	12 - 29	With three nozzles and three thermo-sleeve
BKD90-D-5/20(5/5)-TM	7 - 19	With five nozzles and five thermo-sleeve

UGA SYSTEM-TECHNIK GmbH & Co. KG

Heidenheimer Str. 80 – 82

89542 Herbrechtingen/Germany

Phone +49 7324 9696-0, Fax +49 7324 9696-96

E-Mail: info@uga.eu, Internet: www.uga.eu

Our information is based on current technical knowledge. We reserve the right to make technical changes. Due to the wide range of possible influences during assembly and application, our information does not exempt processors and users from carrying out their own tests and inspections.

The corresponding assembly instructions apply to all UGA products.